


Refer to DR-104 for minimum and maximum allowable cover H for the particular kind of pipe culvert.


- 1 The backfill adjacent to and above the pipe culvert may be placed in conjunction with normal embankment construction. Thoroughly tamp the embankment within the limits shown.
- 2 Take extra care to ensure complete and satisfactory tamping of backfill material in the area immediately adjacent to the lower portion of pipe.
- 3 Carefully shape excavation below groundline either using a template conforming to actual dimension and shape of the pipe or using other means. If using other means, check with a template conforming to the actual dimension and shape of the pipe.
- 4 For culverts backfilled by flooding, place a cohesive soil plug at the inlet, outlet, and, when necessary, sides, prior to flooding.
- 5 4-inch Porous Backfill bedding. 2-inch Floodable Backfill bedding may be used under unsealed rigid pipe.
- 6 Extend Porous Backfill through the outlet end soil plug when used for bedding.
- 7 Quantity calculations are based upon a 1:1 slope and minimum trench dimension. Actual slope of trench may vary based upon Contractor's operations.
- 8 Ground Line at time of pipe installation. When existing ground exceeds 5 feet depth over pipe, backfill and compaction by flooding is not required more than 5 feet above the pipe.
- 9 Where a corrugated metal pipe culvert requiring elongation is to be installed (to counteract deformation caused by backfill), complete elongation using a means approved by the Engineer. Elongation may be developed either as part of shop fabrication or field installation. Install with elongated axis vertical.

Possible Contract Items:
Flowable Mortar
Flooded Backfill
Excavation, Class 20


Possible Tabulations:
104-3
104-4

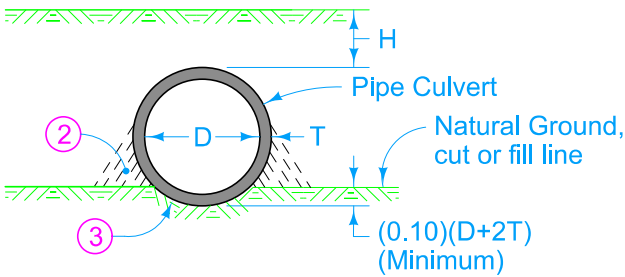


CLASS 'C' BEDDING & BACKFILL

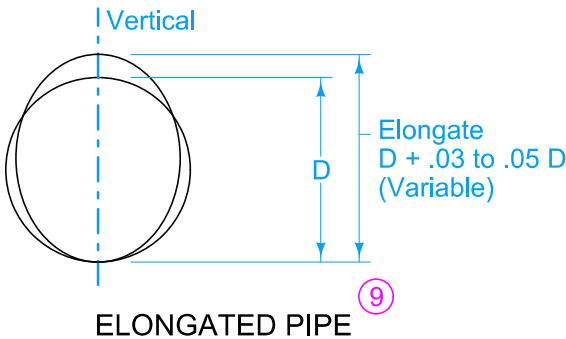

ELONGATED PIPE

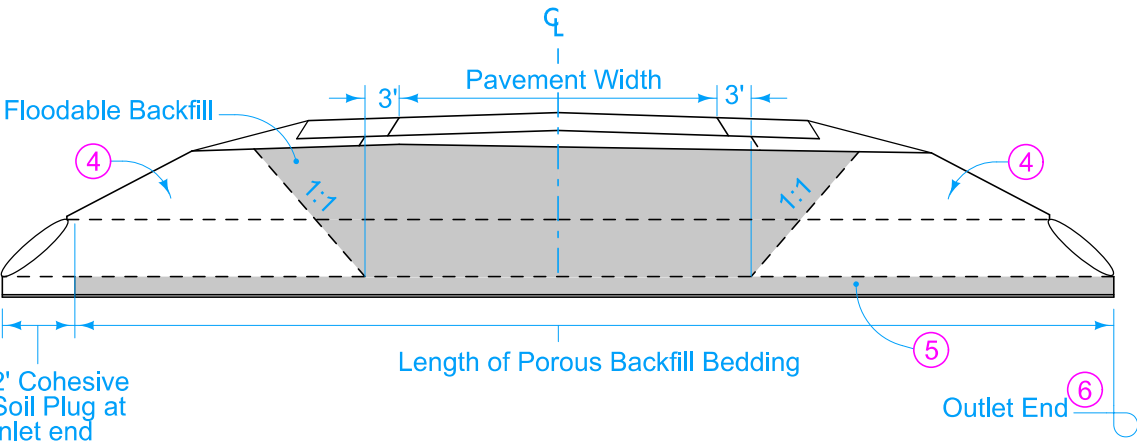


TYPICAL SECTION - SOIL PLUG

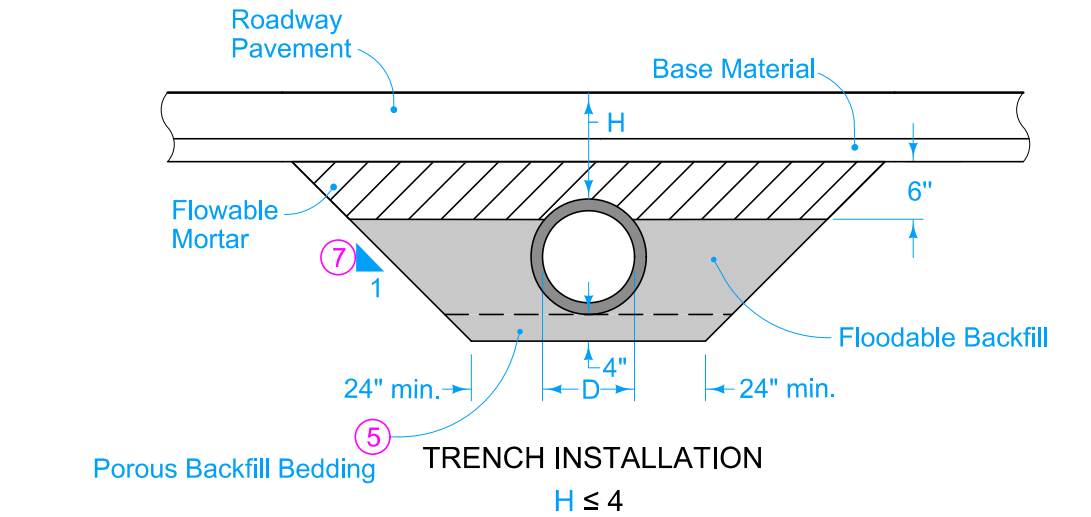


TRENCH INSTALLATION

$H \leq 4$

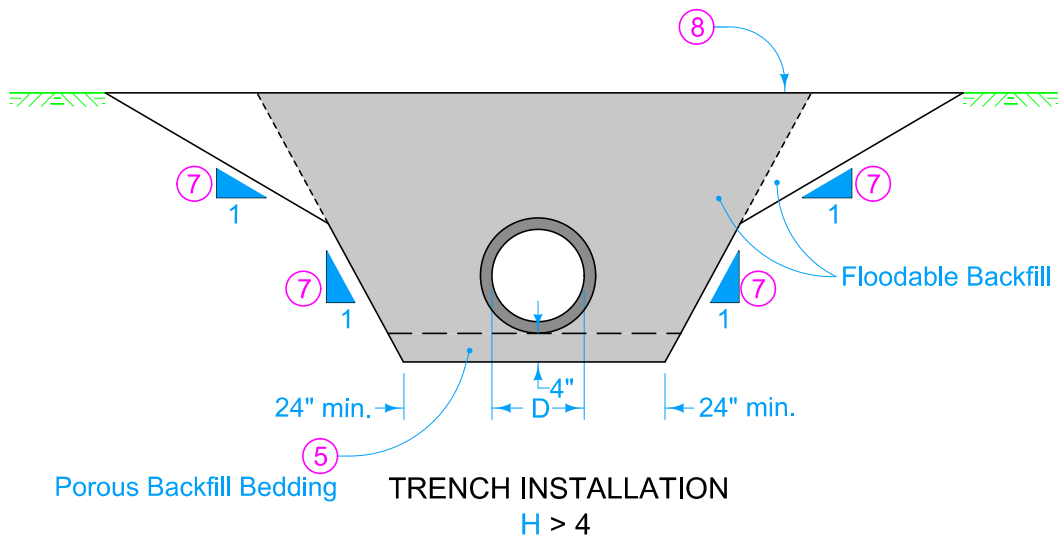

TRENCH INSTALLATION

$H > 4$

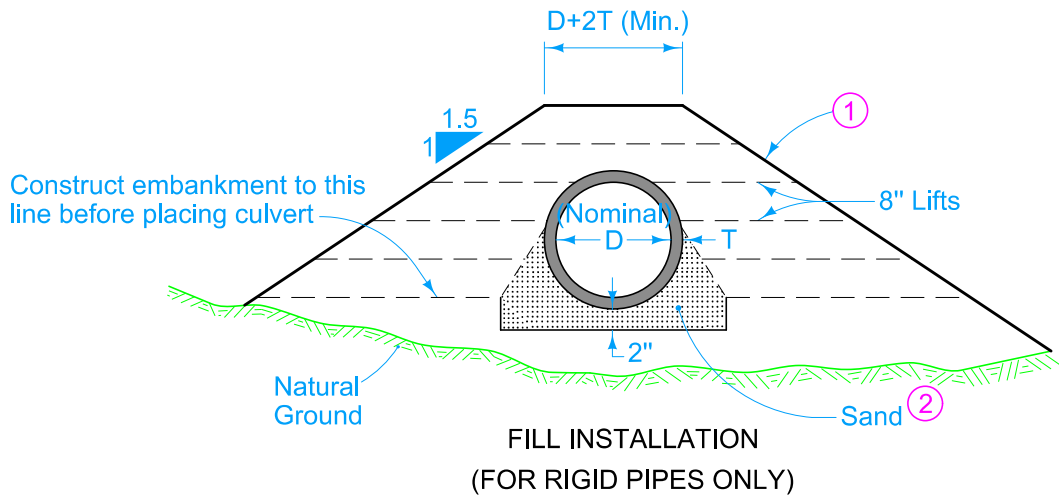

FILL INSTALLATION

(FOR RIGID PIPES ONLY)

CLASS 'B' BEDDING & BACKFILL

Denotes pay limits for flooded backfill

IOWA DOT		REVISION	
2		04-18-17	
STANDARD ROAD PLAN		DR-101	
SHEET 1 of 1			

REVISIONS: Changed "Porous Backfill" to "Porous Backfill Bedding" for clarity. Modified trench installation detail for H>4' to clarify pay limits.

APPROVED BY DESIGN METHODS ENGINEER

PIPE CULVERT
(BEDDING AND BACKFILL)