

DESIGN RATES (Per Station)		
ITEM	RATE	QUANTITY
Surface Course	150 lbs./cu.ft	Tons
Intermediate Course	147 lbs./cu.ft	Tons
Tack Coat	0.05 gal./sq.yd.	Gal.
Milling	145 lbs./cu.ft	Tons

Notes:

- ① Finished slope shall match existing pavement except that the maximum allowable slope is 3.0%, minimum allowable slope is 2.0%. Section may be modified as directed by the Engineer through areas of special shaping.
- Refer to tabulation listing of superelevated curves and Standard Road Plans for additional requirements through superelevated curves.

- ② Estimated for 2 applications.
- ③ Division 2
See Typical 7135 & 7151 on Sheet B.2.

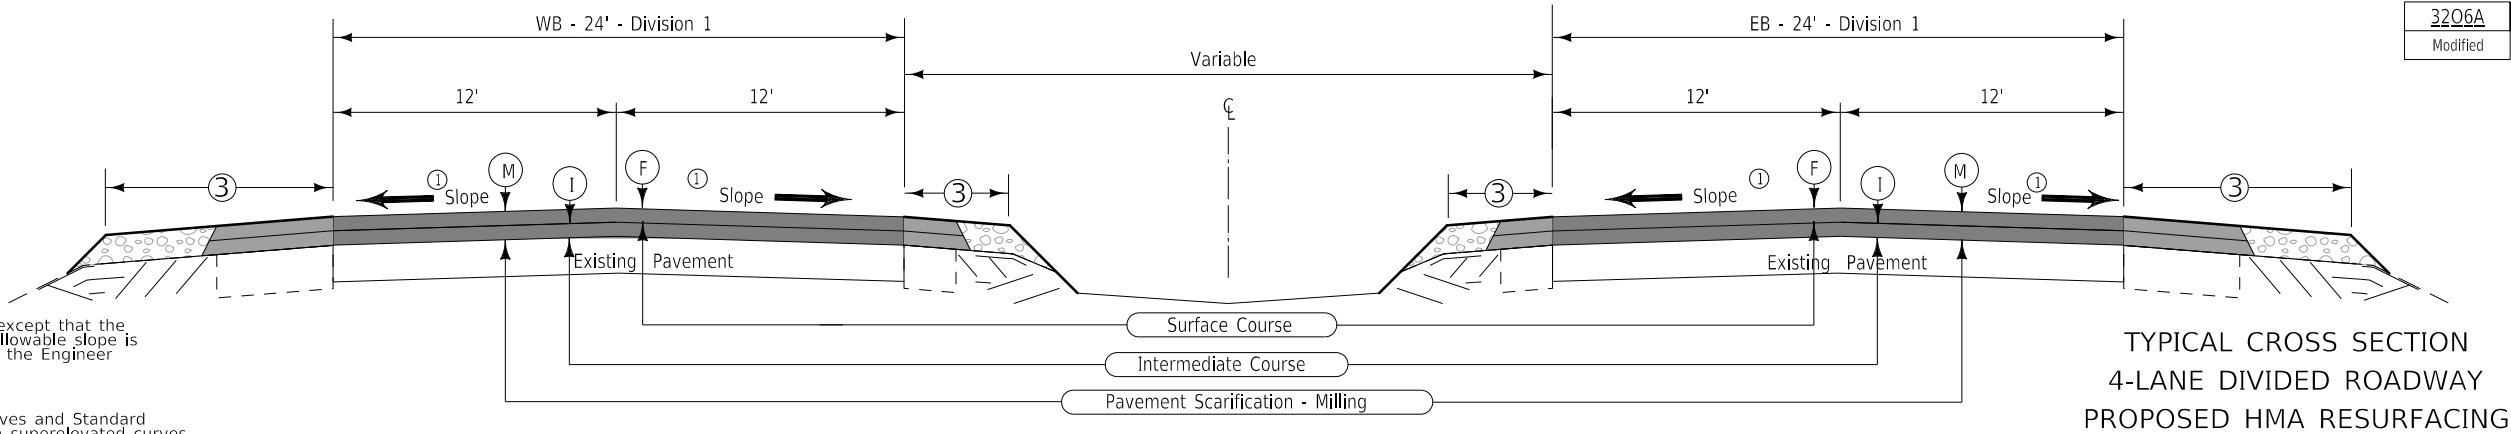


TABLE OF DESIGN QUANTITIES Per Station														
LOCATION				(F)	(I)	(M)	TACK COAT	SURFACE BINDER	INTERMED. BINDER	HOT MIX ASPHALT HT	HOT MIX ASPHALT HT	PAVEMENT SCARIFICATION	Blade & Shape	REMARKS
ROAD IDENTIFICATION	STATION TO STATION	DIRECTION	LANE	Inches	Inches	Inches	Gallons ②	64-34E+ Tons	PG 58-28H Tons	Tons	Tons	SY	STA	
US 20	848+58 to 989+82	EB	B	1.5	1.5	3.0	26.67	1.80	1.32	22.50	22.05	266.70	2.00	BOP to MP 15.64
US 20	75+34 to 165+59.4	WB	B	1.5	1.5	3.0	26.67	1.80	1.32	22.50	22.05	266.70	2.00	MP 19.23 to EOP
US 20	200+00 to 219+06	WB	B	1.5	1.5	3.0	26.67	1.80	1.32	22.50	22.05	266.70	2.00	MP 19.23 to EOP
US 20	75+34 to 165+59.4	EB	B	1.5	1.5	0	26.67	1.80	1.32	22.50	22.05	0	2.00	MP 19.23 to EOP W/ DBR
US 20	200+00 to 219+06	EB	B	1.5	1.5	0	26.67	1.80	1.32	22.50	22.05	0	2.00	MP 19.23 to EOP W/ DBR

DESIGN RATES (Per Station)		
ITEM	RATE	QUANTITY
Surface Course	150 lbs./cu.ft	Tons
Tack Coat	0.05 gal./sq.yd.	Gal.
Milling	145 lbs./cu.ft	Tons

Notes:

- ① Finished slope shall match existing pavement except that the maximum allowable slope is 3.0%, minimum allowable slope is 2.0%. Section may be modified as directed by the Engineer through areas of special shaping.
- Refer to tabulation listing of superelevated curves and Standard Road Plans for additional requirements through superelevated curves.

- ② Estimated for 1 application.
- ③ Division 2
See Typical 7135 & 7151 on Sheet B.2.

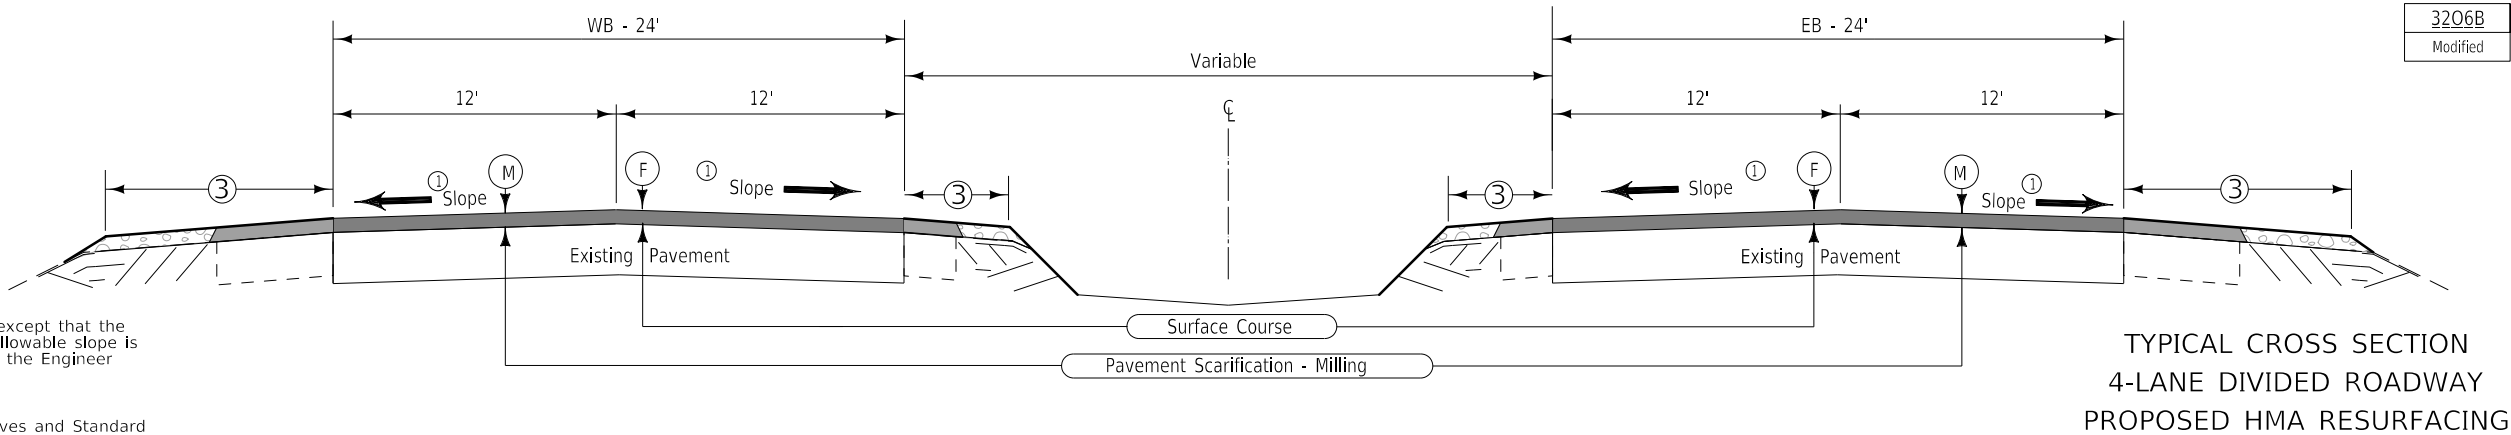


TABLE OF DESIGN QUANTITIES Per Station											
LOCATION				(F)	(M)	TACK COAT	ASPHALT BINDER	HOT MIX ASPHALT HT	PAVEMENT SCARIFICATION	BLADE & SHAPE	REMARKS
ROAD IDENTIFICATION	STATION TO STATION	DIRECTION	LANE	Inches	Inches	Gallons ②	64-34E+ Tons	Tons	SY	STA	
US 20	989+82 to 1112+35	EB	B	1.5	1.5	13.34	1.80	22.50	266.70	2.00	MP 15.64 to MP 19.23 DIV. 1
US 20	1118+60 to 1121+80	EB	B	1.5	1.5	13.34	1.80	22.50	266.70	2.00	MP 15.64 to MP 19.23 DIV. 1
US 20	1121+80 to 1127+90	EB	B	1.5	1.5	13.34	1.80	22.50	266.70	2.00	MP 15.64 to MP 19.23 DIV. 3
US 20	57+29 to 69+94	EB	B	1.5	1.5	13.34	1.80	22.50	266.70	2.00	MP 15.64 to MP 19.23 DIV. 1
US 20	858+10 to 861+35	WB	B	1.5	1.5	13.34	1.80	22.50	266.70	2.00	BOP to MP 15.64 DIV. 1
US 20	885+95 to 898+53	WB	B	1.5	1.5	13.34	1.80	22.50	266.70	2.00	BOP to MP 15.64 DIV. 1
US 20	965+18 to 978+17	WB	B	1.5	1.5	13.34	1.80	22.50	266.70	2.00	BOP to MP 15.64 DIV. 1
US 20	1002+00 to 1083+30	WB	B	1.5	1.5	13.34	1.80	22.50	266.70	2.00	MP 15.64 to MP 19.23 DIV. 1
US 20	1095+65 to 1097+10	WB	B	1.5	1.5	13.34	1.80	22.50	266.70	2.00	MP 15.64 to MP 19.23 DIV. 1
US 20	1102+50 to 1112+00	WB	B	1.5	1.5	13.34	1.80	22.50	266.70	2.00	MP 15.64 to MP 19.23 DIV. 1
US 20	1119+65 to 1121+80	WB	B	1.5	1.5	13.34	1.80	22.50	266.70	2.00	MP 15.64 to MP 19.23 DIV. 1
US 20	1121+80 to 1131+17.6	WB	B	1.5	1.5	13.34	1.80	22.50	266.70	2.00	MP 15.64 to MP 19.23 DIV. 3
US 20	26+70.95 to 45+25	WB	B	1.5	1.5	13.34	1.80	22.50	266.70	2.00	MP 15.64 to MP 19.23 DIV. 3
US 20	45+25 to 75+34	WB	B	1.5	1.5	13.34	1.80	22.50	266.70	2.00	MP 15.64 to MP 19.23 DIV. 1