


SIGNS FACING
OPPOSING TRAFFIC

SIGNS FACING TRAFFIC
APPROACHING FROM
THE REAR

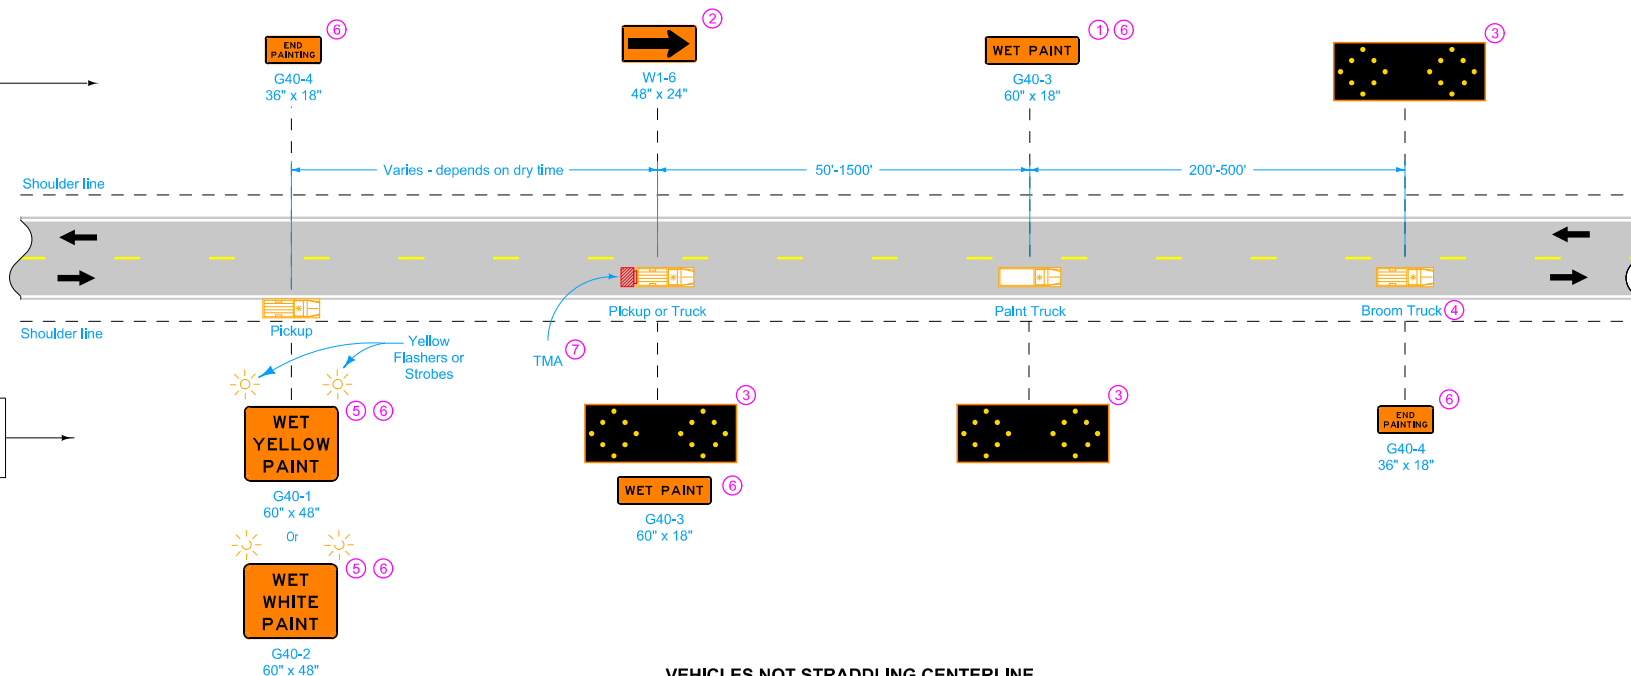

VEHICLES NOT STRADDLING CENTERLINE

This layout may be used when painting edgeline or centerline markings.

Equip all vehicles with an amber revolving light or amber strobe light.

Possible Contract Item:
Traffic Control

- ① Use this sign when painting centerline markings.
- ② Optional Fluorescent Yellow Green (FYG) sign background may be used.
- ③ This arrow board may be operated in a four-corner caution mode.
- ④ Move this vehicle to the shoulder to accommodate passing traffic.
- ⑤ A vehicle mounted Portable Dynamic Message Sign (PDMS) may be used in lieu of this sign.
- ⑥ Refer to [SI-881](#) for sign details.
- ⑦ TMA required for speed limits of 55 mph or greater and ADT greater than 3,000.


LEGEND

- ← Direction of Traffic
- ▨ Truck-Mounted Attenuator (TMA)

	REVISION
	7 10-17-17
STANDARD ROAD PLAN	TC-233
REVISIONS: Added Circle Note 7.	SHEET 1 of 2
APPROVED BY DESIGN METHODS ENGINEER	
PAVEMENT MARKING OPERATIONS	
TWO-LANE	

SIGNS FACING
OPPOSING TRAFFIC

SIGNS FACING TRAFFIC
APPROACHING FROM
THE REAR

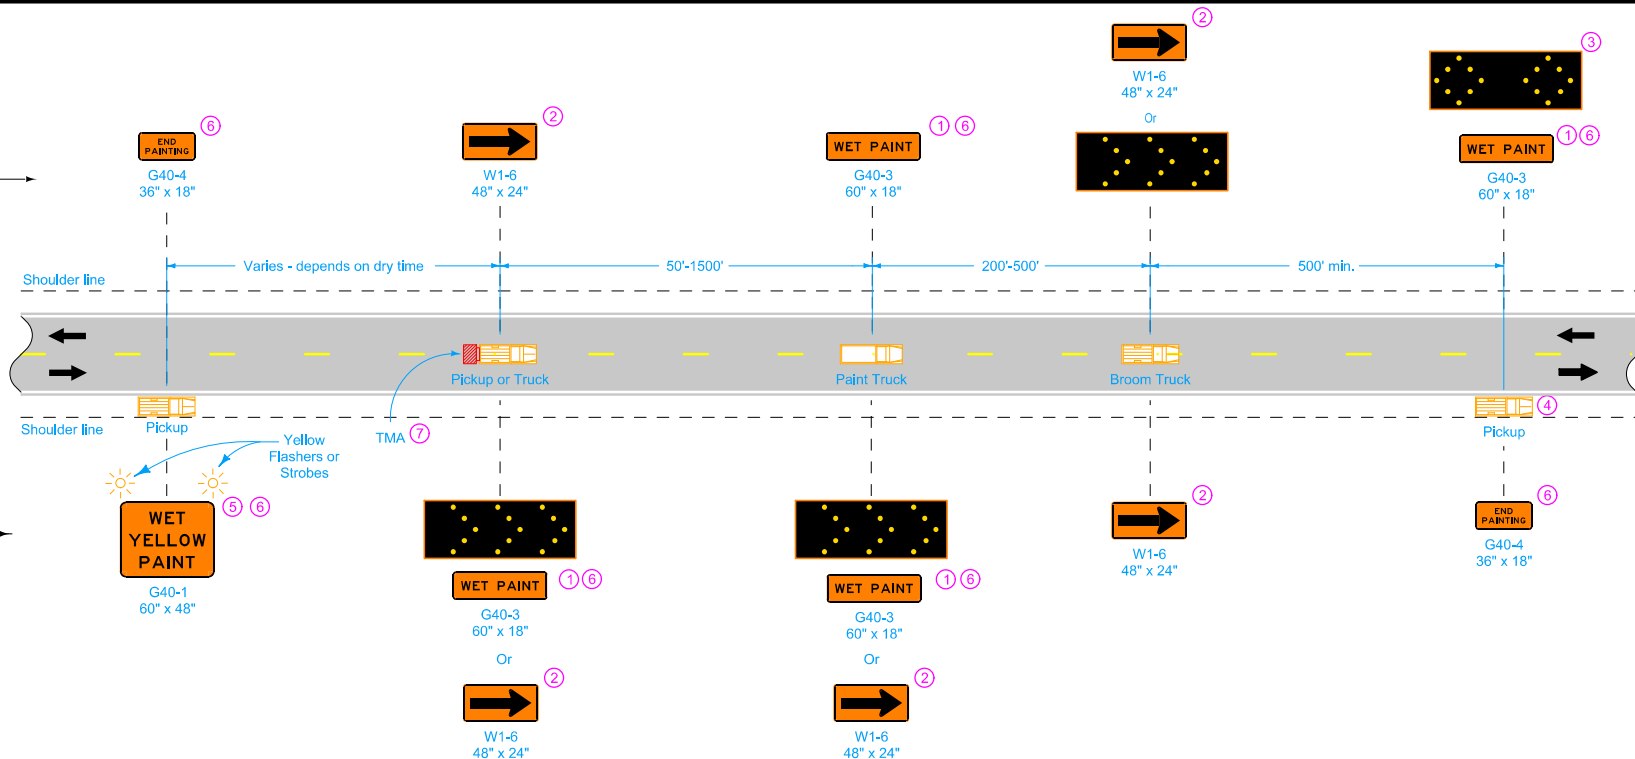

VEHICLES STRADDLING CENTERLINE

- ① Use this sign when painting centerline markings.
- ② Optional Fluorescent Yellow Green (FYG) sign background may be used.
- ③ This arrow board may be operated in a four-corner caution mode.
- ④ Move this vehicle to the shoulder to accommodate passing traffic.
- ⑤ A vehicle mounted Portable Dynamic Message Sign (PDMS) may be used in lieu of this sign.
- ⑥ Refer to [SI-881](#) for sign details.
- ⑦ TMA required for speed limits of 55 mph or greater and ADT greater than 3,000.

 STANDARD ROAD PLAN	REVISION
	7 10-17-17
	TC-233
SHEET 2 of 2	
REVISIONS: Added Circle Note 7.	
 APPROVED BY DESIGN METHODS ENGINEER	
PAVEMENT MARKING OPERATIONS TWO-LANE	

LEGEND

- Direction of Traffic
- Truck-Mounted Attenuator (TMA)