




* Series 2000 Standard Alphabets.

** Optically space numerals about vertical center line.

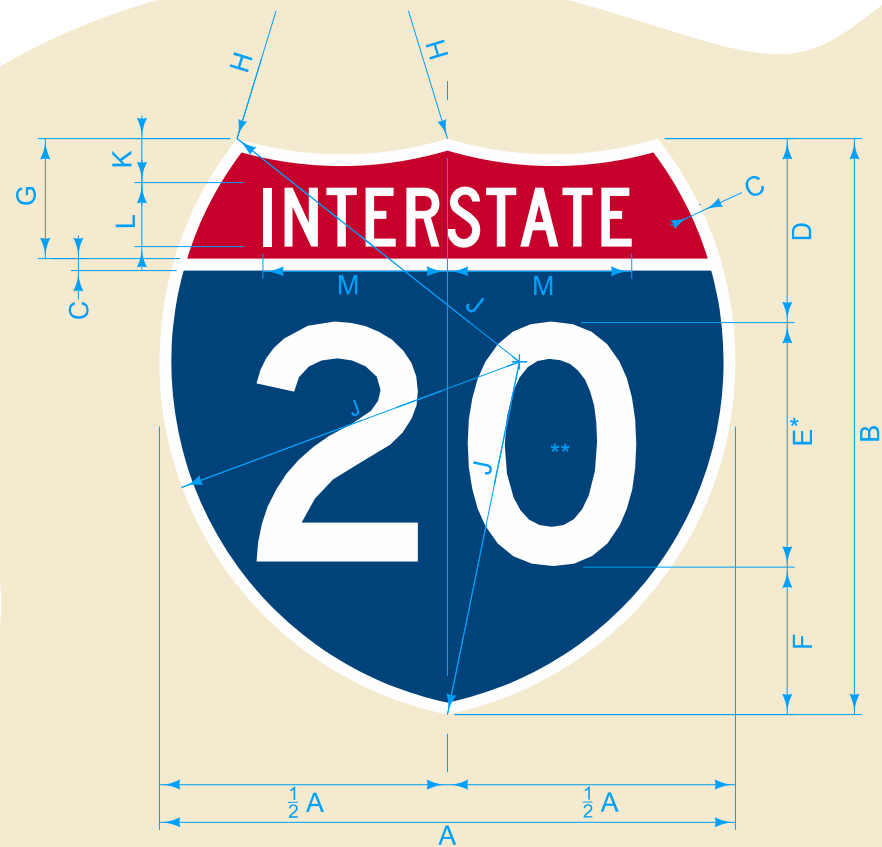


INTERSTATE ROUTE MARKERS

Sign	Width	Height	Border Thick.	Numeral Top Offset	Numeral Height & Font	Numeral Bottom Offset	Upper Section Height	Top Radius	Side Radius	Text Top Offset	Text Height & Font	Text Length Lt & Rt
2 Digit Routes	A	B	C	D	E	F	G	H	J	K	L	M
	48	48	1	15.375	20 C	12.625	10	30	30	4	5 C	15.307
	36	36	0.75	11.5	15 C	9.5	7.5	22.5	22.5	2.75	4 C	12.246
	24	24	0.5	7.625	10 C	6.375	5	15	15	2	2.5 C	7.658
	15	15	0.3125	4.75	6.35	3.9	3.125	9.375	9.375	1	1.75	5.32
	13	13	0.271	4.125	5.5 C	3.375	2.708	8.125	8.125	0.875	1.5 C	4.6125
	10	10	0.208	3.25	4.25 C	2.5	2.083	6.25	6.25	0.75	1 C	3.075
	6	6	0.125	2	2.5 C	1.5	1.25	3.75	3.75	0.5	0.625 C	1.92
3 Digit Routes	60	48	1	15.375	20 B	12.625	10	48	34	4	5 E	21.818
	45	36	0.75	11.5	15 B	9.5	7.5	36	25.5	2.75	4 E	17.455
	30	24	0.5	7.625	10 B	6.375	5	24	17	2	2.5 E	10.911
	18.75	15	0.3125	4.75	6.35	3.9	3.125	15	10.625	1	1.75	7.58
	16.25	13	0.271	4.125	5.5 B	3.375	2.708	13	9.2083	0.875	1.5 E	6.57
	12	10	0.208	3.25	4.25 B	2.5	2.083	10	7.0833	0.75	1 E	4.38
	7.5	6	0.125	2	2.5 B	1.5	1.25	6	4.25	0.5	0.625 E	2.74


All dimensions are in inches unless otherwise designated.

COLORS:
Text: White
Border: White
Background (Interstate): Red
Background (Route No.): Blue

IOWA IDOT STANDARD ROAD PLAN REVISIONS: Added 15" tall route shields for Interstates, U.S. Hwys, & IA Hwys. Added Circle Note 2 to Sheet 4. APPROVED BY DESIGN METHODS ENGINEER	REVISION			
	4	10-16-18		
	SI-121			
SHEET 1 of 5				
FABRICATION - SIGN LEGEND COMPONENTS				

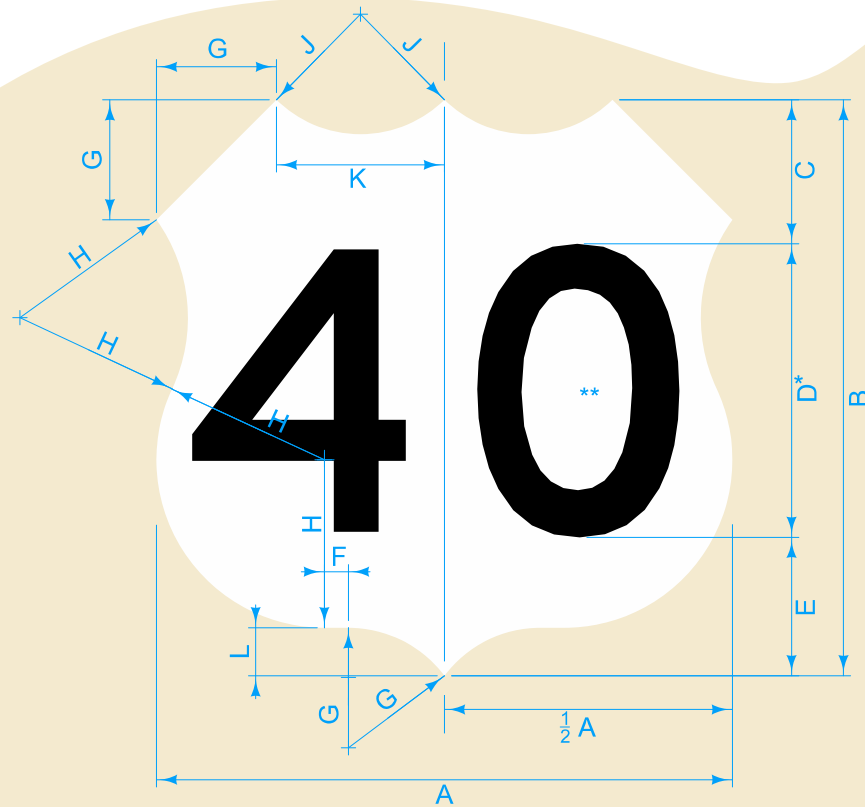

* Series 2000 Standard Alphabets.
** Optically space numerals about vertical center line.

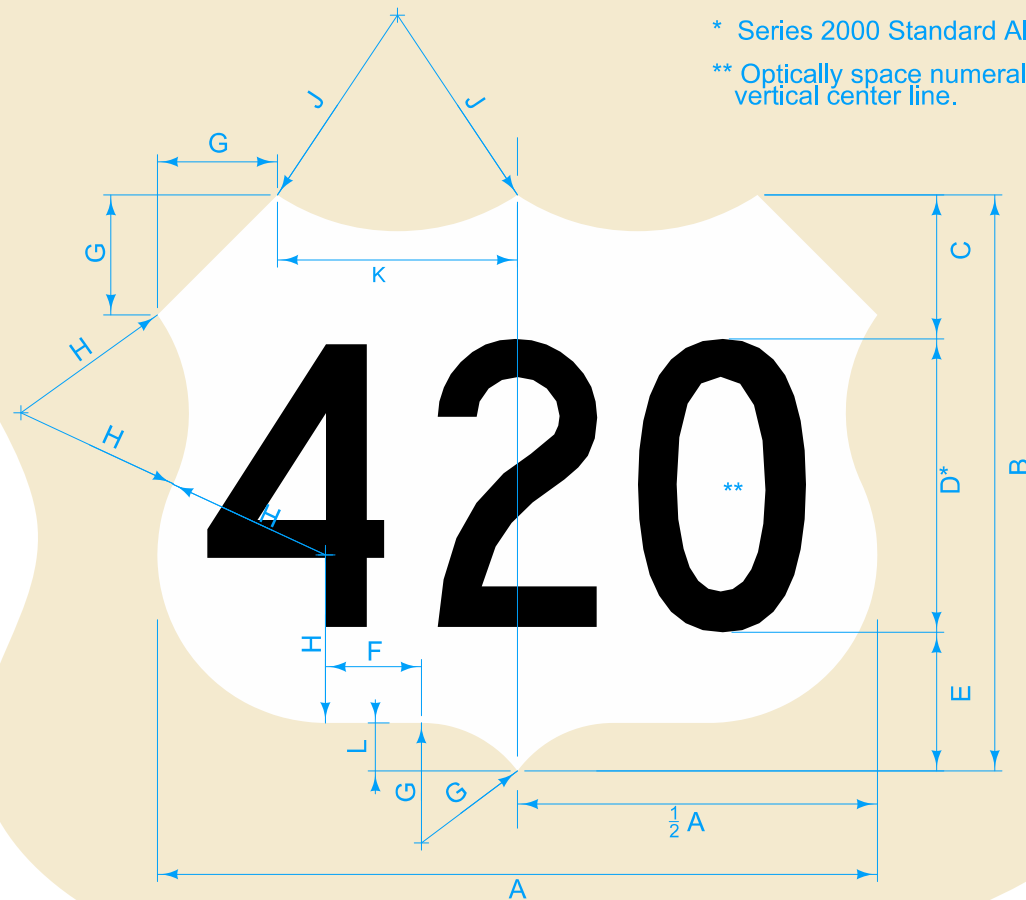

US ROUTE MARKERS



① Black borders added to route shields will not be accepted.

Sign	Width	Height	Numerals Top Offset	Numerals Height & Font	Numerals Bottom Offset	Bottom Tangent Length	Upper Section Height	Corner & Top Radius	Side Radius	Top Radius	Bottom Tangent Offset
1 Digit Routes	A	B	C	D	E	F	G	H	J	K	L
	48	48	11	24 D	13	2	10	14	10	14	4
	36	36	8.25	18 D	9.75	1.5	7.5	10.5	7.5	10.5	3
	24	24	5.5	12 D	6.5	1	5	7	5	7	2
	15	15	3.45	7.5 D	4	0.625	3.125	4.375	3.125	4.375	1.25
	13	13	3	6.5 D	3.5	0.542	2.708	3.792	2.708	3.792	1.083
	10	10	2.25	5 D	2.75	0.417	2.083	2.917	2.083	2.917	0.833
	6	6	1.375	3 D	1.625	0.25	1.25	1.75	1.25	1.75	0.5
2 Digit Routes	48	48	11	24 C	13	2	10	14	10	14	4
	36	36	8.25	18 C	9.75	1.5	7.5	10.5	7.5	10.5	3
	24	24	5.5	12 C	6.5	1	5	7	5	7	2
	15	15	3.45	7.5 C	4	0.625	3.125	4.375	3.125	4.375	1.25
	13	13	3	6.5 C	3.5	0.542	2.708	3.792	2.708	3.792	1.083
	10	10	2.25	5 C	2.75	0.417	2.083	2.917	2.083	2.917	0.833
	6	6	1.375	3 C	1.625	0.25	1.25	1.75	1.25	1.75	0.5
3 Digit Routes	60	48	11	24 B	13	8	10	14	18	20	4
	45	36	8.25	18 B	9.75	5.5	7.5	10.5	13.5	15	3
	30	24	5.5	12 B	6.5	4	5	7	9	10	2
	18.75	15	3.45	7.5 B	4	2.5	3.125	4.375	5.625	6.25	1.25
	16.25	13	3	6.5 B	3.5	2.167	2.708	3.792	4.875	5.416	1.083
	12	10	2.25	5 B	2.75	1.417	2.083	2.917	3.439	3.917	0.833
	7.5	6	1.375	3 B	1.625	1	1.25	1.75	2.25	2.5	0.5

All dimensions are in inches unless otherwise designated.

COLORS:
Text: White
Shield: White

STANDARD ROAD PLAN

REVISIONS: Added 15" tall route shields for Interstates, U.S. Hwys, & IA Hwys.
Added Circle Note 2 to Sheet 4.

APPROVED BY DESIGN METHODS ENGINEER


FABRICATION -
SIGN LEGEND COMPONENTS

REVISION

410-16-18


SI-121

SHEET 2 of 5

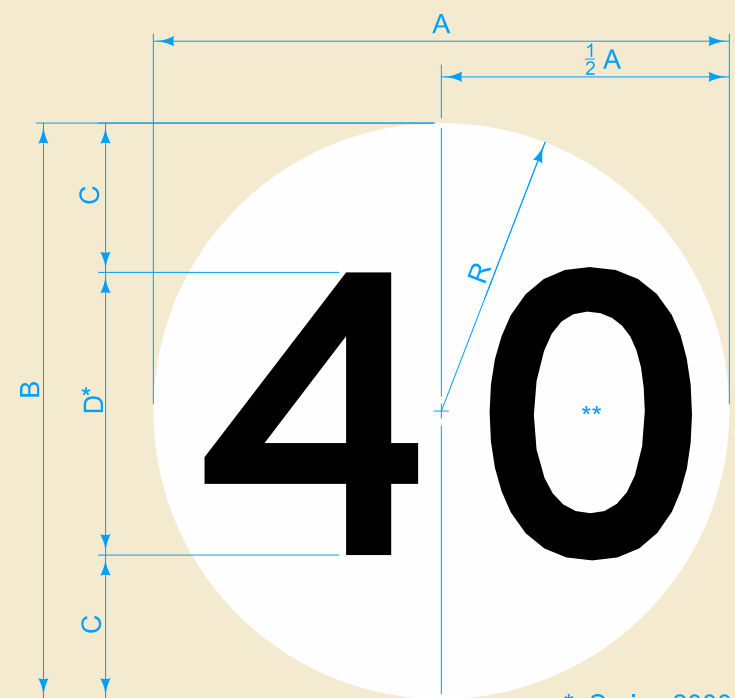

* Series 2000 Standard Alphabets.

** Optically space numerals about vertical center line.

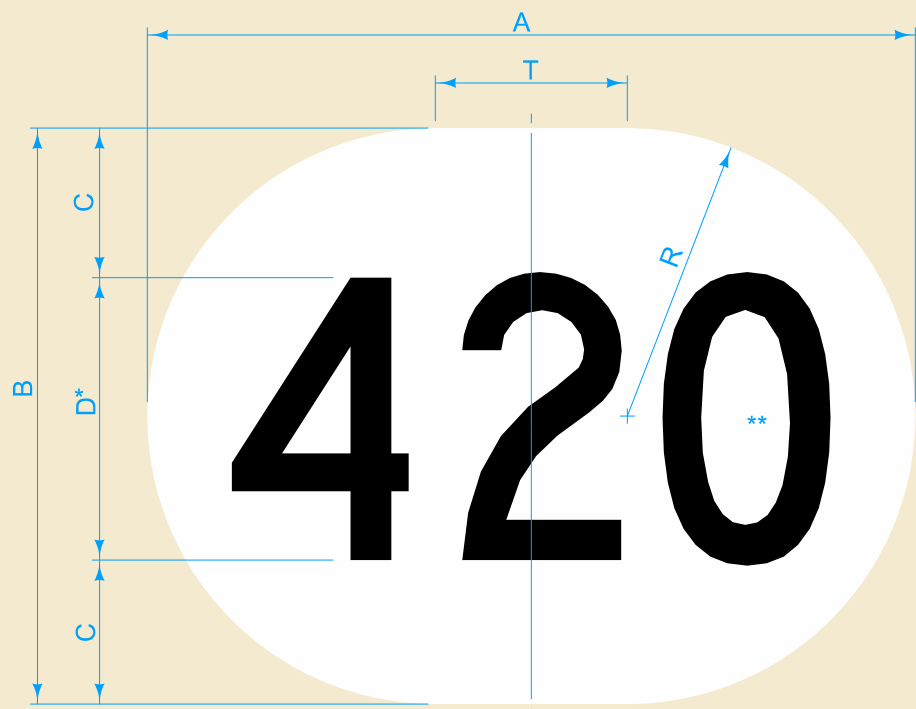

STATE ROUTE MARKERS



① Black borders added to route shields will not be accepted.

Sign	Width	Height	Numeral Offset	Numeral Height & Font	Radius	Tangent
	A	B	C	D	R	T
1 Digit Routes	48	48	12	24 D	24	-
	36	36	9	18 D	18	-
	24	24	6	12 D	12	-
	15	15	3.75	7.5 D	7.5	-
	13	13	3.25	6.5 D	6.5	-
	10	10	2.5	5 D	5	-
	6	6	1.5	3 D	3	-
2 Digit Routes	48	48	12	24 C	24	-
	36	36	9	18 C	18	-
	24	24	6	12 C	12	-
	15	15	3.75	7.5 C	7.5	-
	13	13	3.25	6.5 C	6.5	-
	10	10	2.5	5 C	5	-
	6	6	1.5	3 C	3	-
3 Digit Routes	60	48	12	24 B	24	12
	45	36	9	18 B	18	9
	30	24	6	12 B	12	6
	18.75	15	3.75	7.5 B	7.5	3.75
	16.25	13	3.25	6.5 B	6.5	3.25
	12	10	2.5	5 B	5	2
	7.5	6	1.5	3 B	3	1.5

All dimensions are in inches unless otherwise designated.

COLORS:
Text: Black
Shield: White

STANDARD ROAD PLAN


REVISIONS: Added 15" tall route shields for Interstates, U.S. Hwys, & IA Hwys. Added Circle Note 2 to Sheet 4.

APPROVED BY DESIGN METHODS ENGINEER

FABRICATION -
SIGN LEGEND COMPONENTS

REVISION	
4	10-16-18
SI-121	
SHEET 3 of 5	

② Yellow sheeted background plaque will not be accepted.

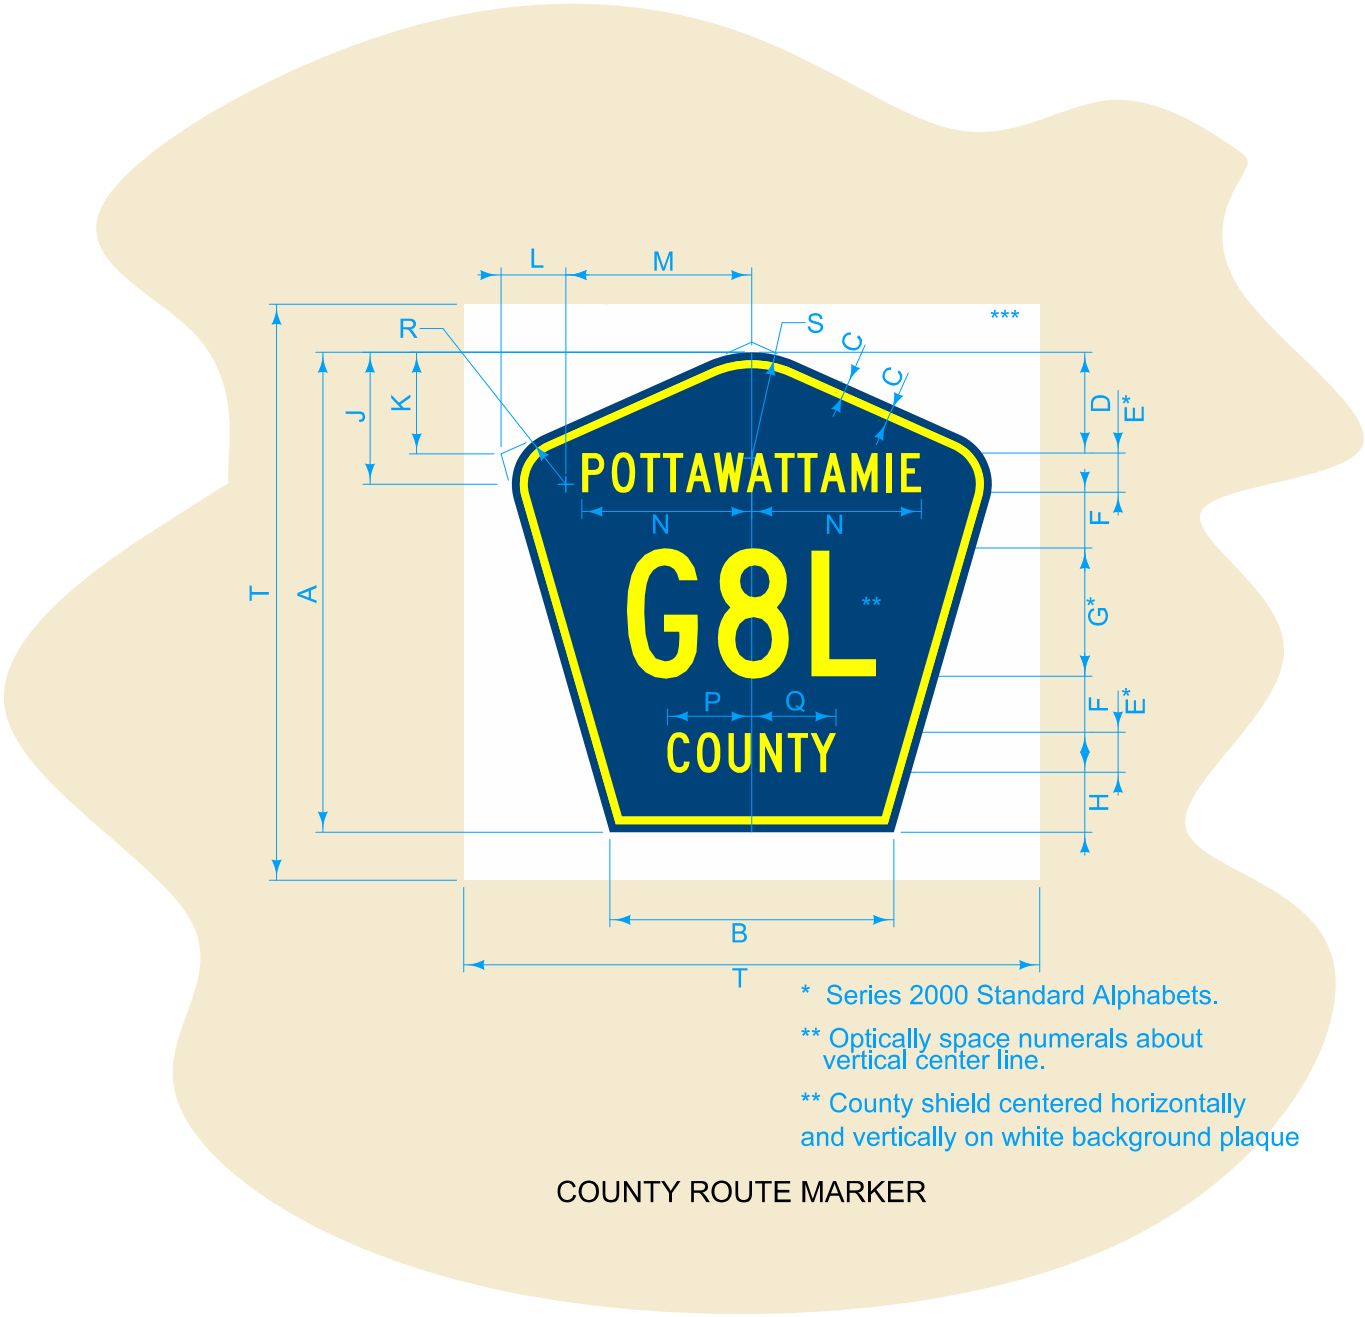

* Series 2000 Standard Alphabets.
** Optically space numerals about vertical center line.
** County shield centered horizontally and vertically on white background plaque

COUNTY ROUTE MARKER

All dimensions are in inches unless otherwise designated.

COLORS:
Text: Yellow
Border: Yellow
Shield: Blue
Background: White

Sign	Height	Bottom Width	Border Thick. & Indent	County Top Offset	County Text Hgt & Font	Numeral Offset	Numeral Height & Font	County Bottom Offset	Radius Vertical Offset	Corner Vertical Offset	Corner Lateral Offset	Radius Lateral Offset	County Name Lt & Rt	County Text Left	County Text Right	Side Radius	Top Radius	Backgrnd Plaque
	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T
All Routes	36	21.25	0.5	7	3 C	3	12 C	4	10	6.75	4.75	14	VAR	7.5	7.75	4	10	42




STANDARD ROAD PLAN

REVISIONS: Added 15" tall route shields for Interstates, U.S. Hwys, & IA Hwys. Added Circle Note 2 to Sheet 4.


APPROVED BY DESIGN METHODS ENGINEER

**FABRICATION -
SIGN LEGEND COMPONENTS**


REVISION	
4	10-16-18
SI-121	
SHEET 4 of 5	

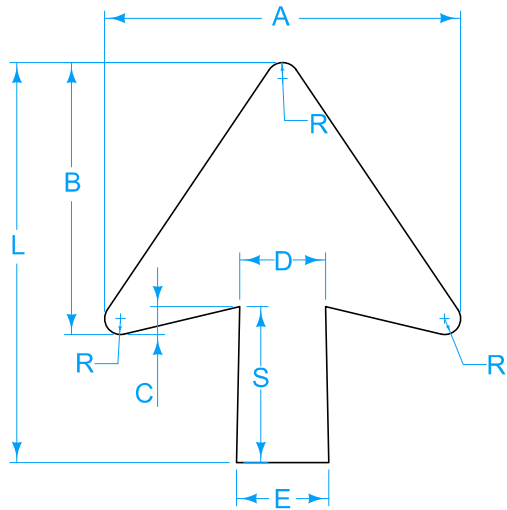


ID	Length	Head Width	Head Length	Draft	Radius	Tip	Shaft Width at Head	Shaft Width at Tail	Shaft Length	Letter Size
	L	A	B	C	R	G	D	E	S	
I-A	17	15.125	11.5625	1.3125	0.8125	Round	3.75	4.03	6.75	8
I-B	25	15.125	11.5625	1.3125	0.8125	Round	3.75	4.36	14.75	8
I-C	20	18.25	14	1.5	0.75	Round	4.5	4.81	7.5	10-13.3
I-D	30	18.25	14	1.5	0.75	Round	4.5	5.23	17.5	10-13.3
I-E	25	22.25	17	1.75	1	Round	5.375	5.78	9.75	16
I-F	35	22.25	17	1.75	1	Round	5.375	6.2	19.75	16

TYPE I

② Type II-A arrows should be used in all typical "down arrow" applications except where not practical due to size constraints.

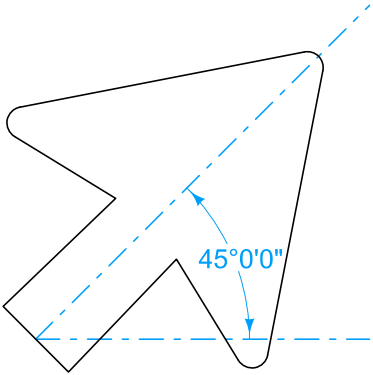

I-E, 45

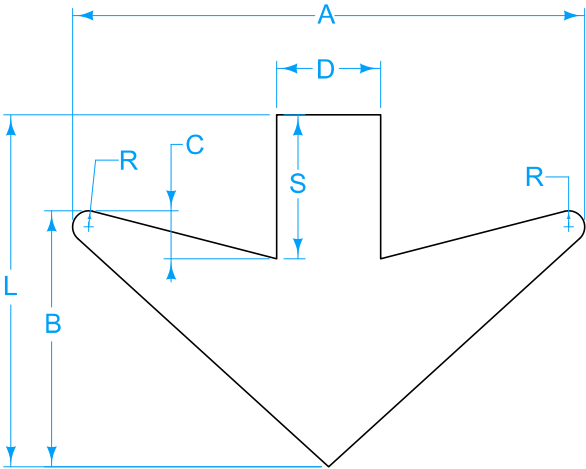


ID	Length	Head Width	Head Length	Draft	Radius	Tip	Shaft Width at Head	Shaft Width at Tail
	L	A	B	C	R	G	D	E
II-B	16	24	12	2.25	0.75	Point	4.875	6.25
II-A	22	32	16	3	1	Point	6.5	9

TYPE II

ARROW DESIGNATION:
Each arrow used on a guide sign is identified by a two part code as follows:
Part 1 is the arrow ID number
Part 2 is the angle in degrees between the center line of the arrow and the horizontal

All dimensions are in inches unless otherwise designated.

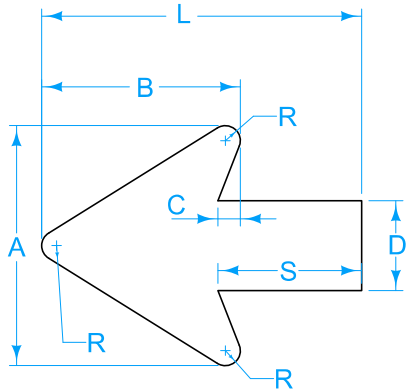

ID	Length	Head Width	Head Length	Draft	Radius	Tip	Shaft Width at Head	Shaft Length
	L	A	B	C	R	G	D	S
III-4S	6	4	3.3125	0.375	0.25	Round	1.5	3.0625
III-4L	12	4	3.3125	0.375	0.25	Round	1.5	9.0625
III-5S	8	5	4.140625	0.46875	0.3125	Round	1.875	4.328
III-5L	12	5	4.140625	0.46875	0.3125	Round	1.875	8.328
III-6S	8	6	4.96875	0.5625	0.375	Round	2.25	3.59375
III-6L	14	6	4.96875	0.5625	0.375	Round	2.25	9.59375
III-8S	10.5	8	6.625	0.75	0.5	Round	3.0	4.625
III-8L	14	8	6.625	0.75	0.5	Round	3.0	8.125

TYPE III

STANDARD ROAD PLAN

REVISIONS: Added 15" tall route shields for Interstates, U.S. Hwys, & IA Hwys.
Added Circle Note 2 to Sheet 4.

APPROVED BY DESIGN METHODS ENGINEER

FABRICATION -
SIGN LEGEND COMPONENTS

REVISION

410-16-18

SI-121

SHEET 5 of 5