

EPOXY COATED REINFORCING BAR LIST, PRECAST ABUTMENT BACKWALL (ONE UNIT)

(INCLUDED IN BID ITEM "PRECAST ABUTMENT BACKWALL (CONCRETE WINGS)", EACH)

BAR	LOCATION	SPAN	REINFORCED CONCRETE BOX BEAMS															PRETENSIONED PRESTRESSED CONCRETE BOX BEAMS														
			30'-0"			40'-0"			50'-0"			30'-0"			40'-0"			50'-0"			60'-0"			70'-0"								
			SHAPE	NO.	WEIGHT	SHAPE	NO.	WEIGHT	SHAPE	NO.	WEIGHT	SHAPE	NO.	WEIGHT	SHAPE	NO.	WEIGHT	SHAPE	NO.	WEIGHT	SHAPE	NO.	WEIGHT	SHAPE	NO.	WEIGHT						
4d1	BACKWALL, VERTICAL STIRRUPS		18	6'-1	73	18	6'-1	73	18	7'-1	85	18	5'-1	61	18	5'-1	61	18	6'-1	73	18	6'-1	73	18	7'-1	85						
4d2	BACKWALL, VERTICAL STIRRUPS		1	9'-9	7	1	9'-9	7	1	10'-9	7	1	8'-9	6	1	8'-9	6	1	9'-9	7	1	9'-9	7	1	10'-9	7						
4d3	BACKWALL, VERTICAL STIRRUPS		1	8'-9	6	1	8'-9	6	1	9'-9	7	1	8'-1	5	1	8'-1	5	1	8'-9	6	1	8'-9	6	1	9'-9	7						
4d4	BACKWALL, VERTICAL STIRRUPS		1	7'-11	5	1	7'-11	5	1	8'-11	6	1	7'-7	5	1	7'-7	5	1	7'-11	5	1	7'-11	5	1	8'-11	6						
4d5	BACKWALL, VERTICAL STIRRUPS		1	6'-11	5	1	6'-11	5	1	7'-11	5	1	6'-11	5	1	6'-11	5	1	6'-11	5	1	6'-11	5	1	7'-11	5						
8d7 *	BACKWALL, VERTICAL		9	2'-2	52	9	2'-2	52	9	2'-8	64	9	1'-8	40	9	1'-8	40	9	2'-2	52	9	2'-2	52	9	2'-8	64						
6g1	BACKWALL, HORIZONTAL		2	24'-3	73	2	24'-3	73	2	24'-9	74	2	23'-2	70	2	23'-2	70	2	24'-3	73	2	24'-3	73	2	24'-9	74						
6g2	BACKWALL, HORIZONTAL		2	19'-10	60	2	19'-10	60	2	20'-4	61	2	19'-4	58	2	19'-4	58	2	19'-10	60	2	19'-10	60	2	20'-4	61						
6g3	BACKWALL, HORIZONTAL		2	21'-11	66	2	21'-11	66	2	21'-11	66	2	20'-11	63	2	20'-11	63	2	21'-11	66	2	21'-11	66	2	21'-11	66						
6g4	BACKWALL, HORIZONTAL		4	3'-7	22	4	3'-7	22	4	3'-7	22	4	2'-7	16	4	2'-7	16	4	3'-7	22	4	3'-7	22	4	3'-7	22						
TOTAL (LBS.)			369			369			397			329			329			369			369			397								

* SEE BENT BAR DETAILS. THE LENGTHS SHOWN DO NOT INCLUDE AN ALLOWANCE FOR THE THREADED END. BAR LENGTHS MAY NEED TO INCREASE DEPENDING ON THE MECHANICAL COUPLER ASSEMBLY USED. THE COST OF THE THREADED PORTION OF THESE BARS IS TO BE INCLUDED IN THE PRICE BID FOR THE BACKWALLS. THE WEIGHT OF THE THREADED END IS NOT INCLUDED IN THE QUANTITY SHOWN.

EPOXY COATED REINFORCING BAR LIST, PRECAST ABUTMENT FOOTING (ONE FOOTING)

(INCLUDED IN BID ITEM "PRECAST FOOTING (CONCRETE WINGS)", EACH)

BAR	LOCATION	SPAN	REINFORCED CONCRETE BOX BEAMS															PRETENSIONED PRESTRESSED CONCRETE BOX BEAMS														
			30'-0"			40'-0"			50'-0"			30'-0"			40'-0"			50'-0"			60'-0"			70'-0"								
			SHAPE	NO.	WEIGHT	SHAPE	NO.	WEIGHT	SHAPE	NO.	WEIGHT	SHAPE	NO.	WEIGHT	SHAPE	NO.	WEIGHT	SHAPE	NO.	WEIGHT	SHAPE	NO.	WEIGHT	SHAPE	NO.	WEIGHT						
5c1	FOOTING END, VERTICAL		8	3'-9	31	8	3'-9	31	8	3'-9	31	8	3'-9	31	8	3'-9	31	8	3'-9	31	8	3'-9	31	8	3'-9	31						
5c2	FOOTING END, HORIZONTAL		8	4'-5	37	8	4'-5	37	8	4'-5	37	8	4'-5	37	8	4'-5	37	8	4'-5	37	8	4'-5	37	8	4'-5	37						
8d6**	FOOTING, VERTICAL		18	2'-7	124	18	2'-7	124	18	2'-7	124	18	2'-7	124	18	2'-7	124	18	2'-7	124	18	2'-7	124	18	2'-7	124						
8f1	FOOTING, LONGITUDINAL		12	36'-3	1161	12	36'-3	1161	12	36'-3	1161	12	36'-3	1161	12	36'-3	1161	12	36'-3	1161	12	36'-3	1161	12	36'-3	1161						
6f2	FOOTING, LONGITUDINAL		10	4'-6	68	10	4'-6	68	10	4'-6	68	10	4'-6	68	10	4'-6	68	10	4'-6	68	10	4'-6	68	10	4'-6	68						
5p1	FOOTING, HOOPS		64	11'-8	779	64	11'-8	779	64	11'-8	779	64	11'-8	779	64	11'-8	779	64	11'-8	779	64	11'-8	779	60	11'-8	730						
5p2	FOOTING, HOOPS		4	11'-10	49	4	11'-10	49	4	11'-10	49	4	11'-10	49	4	11'-10	49	4	11'-10	49	4	11'-10	49	4	11'-10	49						
	1 1/4" DIA. SMOOTH DOWELS		8	2'-9	92	8	2'-9	92	8	3'-3	109	8	2'-3	75	8	2'-3	75	8	2'-9	92	8	2'-9	92	8	3'-3	109						
TOTAL (LBS.)			2,341			2,341			2,358			2,324			2,324			2,341			2,336			2,295								

** INCLUDES MECHANICAL COUPLERS. SEE BENT BAR DETAILS.

ABUTMENT NOTES:

MINIMUM CLEAR DISTANCE FROM FACE OF CONCRETE TO NEAR REINFORCING BAR IS TO BE 2" UNLESS OTHERWISE NOTED OR SHOWN. ABUTMENT PILES SHALL BE DRIVEN TO VALUES SHOWN IN THE DESIGN PLANS. THE BACKWALL SHALL BE PLACED AFTER THE UHPC JOINTS BETWEEN THE BEAMS HAVE BEEN COMPLETED. MECHANICAL COUPLERS SHALL BE EPOXY COATED. THE MECHANICAL COUPLERS SHALL MEET THE REQUIREMENTS OF MATERIALS IM 451 APPENDIX E, EXCEPT THE MECHANICAL SPLICE IS REQUIRED TO BE EMBEDDED ON THE ABUTMENT FOOTING SIDE OF THE CONSTRUCTION JOINT. THE PRECAST BACKWALLS SHALL BE DRY FITTED TO THE PRECAST ABUTMENTS IN THE PRECASTER'S YARD OR SHOP BEFORE SHIPPING THE PIECES TO THE FIELD. THE ENGINEER SHALL HAVE 48 HOURS NOTICE TO VIEW AND APPROVE THE CONNECTED PRECAST PIECES BEFORE THEY ARE SHIPPED TO THE FIELD.

CMP PILE


POCKET NOTE:

PILE POCKETS SHALL CONSIST OF GALVANIZED STEEL CORRUGATED METAL PIPE (CMP), TYPE 1, 16 GAGE, IN ACCORDANCE WITH THE PRECAST CONCRETE ELEMENTS NOTES. CMP FOR INDIVIDUAL POCKETS SHALL CONSIST OF A SINGLE LENGTH OF PIPE; SPLICING OF PIPE SECTIONS SHALL NOT BE ALLOWED. NOMINAL CMP SIZE SHALL BE 21". FOLLOWING SETTING OF THE FOOTING, THE PILE POCKETS SHALL BE FILLED LEVEL WITH THE TOP OF FOOTING USING HIGH EARLY STRENGTH SELF-CONSOLIDATING CONCRETE IN ACCORDANCE WITH THE PRECAST CONCRETE ELEMENTS NOTES.

BACKWALL SETTING NOTES:

THE 8d7 BARS SHALL BE SET AS DOWELS IN PREFORMED HOLES. THE DOWELS SHALL BE INSTALLED IN ACCORDANCE WITH THE GROUT MANUFACTURER'S RECOMMENDATIONS. A POLYMER GROUT SYSTEM IN ACCORDANCE WITH STANDARD SPECIFICATIONS SHALL BE USED AS A BONDING AGENT FOR VERTICAL DOWELS. SET PRECAST BACKWALLS ON A EPOXY GROUT BED TO HELP LEVEL AND CONNECT THE PRECAST ELEMENTS. FOLLOW ALL MANUFACTURER'S RECOMMENDATIONS FOR INSTALLATION.


BACKWALL BENT BAR DETAILS

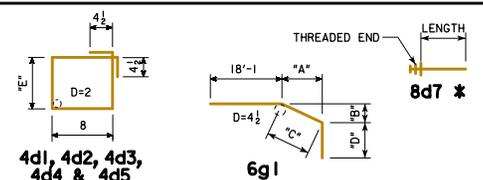

BAR	DIM.	REINFORCED CONCRETE BOX BEAMS			PRETENSIONED PRESTRESSED CONCRETE BOX BEAMS				
		30'-0"	40'-0"	50'-0"	30'-0"	40'-0"	50'-0"	60'-0"	70'-0"
6g1	"A"	3'-9	3'-9	3'-9	2'-9	2'-9	3'-9	3'-9	3'-9
6g1	"B"	1'-10 1/2	1'-10 1/2	1'-10 1/2	1'-4 1/2	1'-4 1/2	1'-10 1/2	1'-10 1/2	1'-10 1/2
6g1	"C"	4'-2	4'-2	4'-2	3'-1	3'-1	4'-2	4'-2	4'-2
6g1	"D"	2'-0	2'-0	2'-6	2'-0	2'-0	2'-0	2'-0	2'-6
4d1	"E"	2'-0	2'-0	2'-6	1'-6	1'-6	2'-0	2'-0	2'-6
4d2	"E"	3'-10	3'-10	4'-4	3'-4	3'-4	3'-10	3'-10	4'-4
4d3	"E"	3'-4	3'-4	3'-10	3'-0	3'-0	3'-4	3'-4	3'-10
4d4	"E"	2'-11	2'-11	3'-5	2'-9	2'-9	2'-11	2'-11	3'-5
4d5	"E"	2'-5	2'-5	2'-11	2'-5	2'-5	2'-5	2'-5	2'-11

NOTE: ALL DIMENSIONS ARE OUT TO OUT. D= PIN DIAMETER.

FOOTING BENT BAR DETAILS

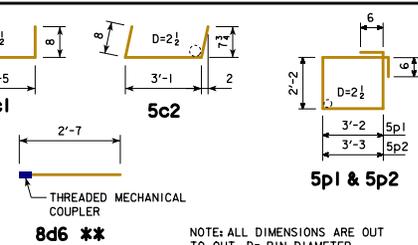

NOTE: ALL DIMENSIONS ARE OUT TO OUT. D= PIN DIAMETER.

ADDITIONAL CONCRETE

EACH FOOTING (C.Y.)	ROADWAY GRADE AT ABUTMENT				
	1%	2%	3%	4%	5%
	-	-	0.6	0.9	1.1

NOTES:

THE ADDITIONAL CONCRETE TABLE LISTS THE ADDITIONAL CONCRETE VOLUME REQUIRED IN EACH PRECAST ABUTMENT FOOTING BASED ON THE ROADWAY GRADE AT EACH ABUTMENT. THIS ADDITIONAL CONCRETE IS INCLUDED IN THE BID ITEM FOR PRECAST FOOTING (CONCRETE WINGS). THE QUANTITIES SHOWN IN THE PRECAST CONCRETE QUANTITIES TABLE ARE BASED ON 0% GRADE.

PRECAST CONCRETE QUANTITIES (INCLUDED IN PRECAST UNITS. (CONCRETE WINGS))

LOCATION	SPAN	REINFORCED CONCRETE BOX BEAMS			PRETENSIONED PRESTRESSED CONCRETE BOX BEAMS				
		30'-0"	40'-0"	50'-0"	30'-0"	40'-0"	50'-0"	60'-0"	70'-0"
EACH BACKWALL UNIT (C.Y.)*		2.1	2.1	2.5	1.6	1.6	2.1	2.1	2.5
EACH FOOTING (C.Y.)		13.4	13.4	13.4	13.4	13.4	13.4	13.1	12.8
CMP PILE POCKETS (EACH FOOTING) (C.Y.)**		1.7	1.7	1.7	1.7	1.7	1.7	2.0	2.3

* INCLUDES THE COST OF FURNISHING AND PLACING ALL PREFORMED EXPANSION JOINT FILLER.
** HIGH EARLY STRENGTH SELF-CONSOLIDATING CONCRETE.

LATEST REVISION DATE

APPROVED BY BRIDGE ENGINEER



STANDARD DESIGN - 30'-0" ROADWAY, SINGLE SPAN CONCRETE BOX BEAM BRIDGES

DECEMBER, 2016

ABUTMENT DETAILS (PRECAST) CONCRETE WINGS QUANTITIES 15° SKEW

B30-22-16