



PART LONGITUDINAL SECTION NEAR GUTTER
(FOR DETAILS OF INTERMEDIATE DIAPHRAGM SEE SHEET H30SI-30-12)

PART END VIEW AT ABUTMENT
PROVIDE ELEVATIONS A, B, AND C IN THE BRIDGE PLAN SHEETS.


NOTE: PLUG 3" PVC PIPE WITH EXPANDING FOAM PRIOR TO BACKFILLING BEHIND ABUTMENTS.

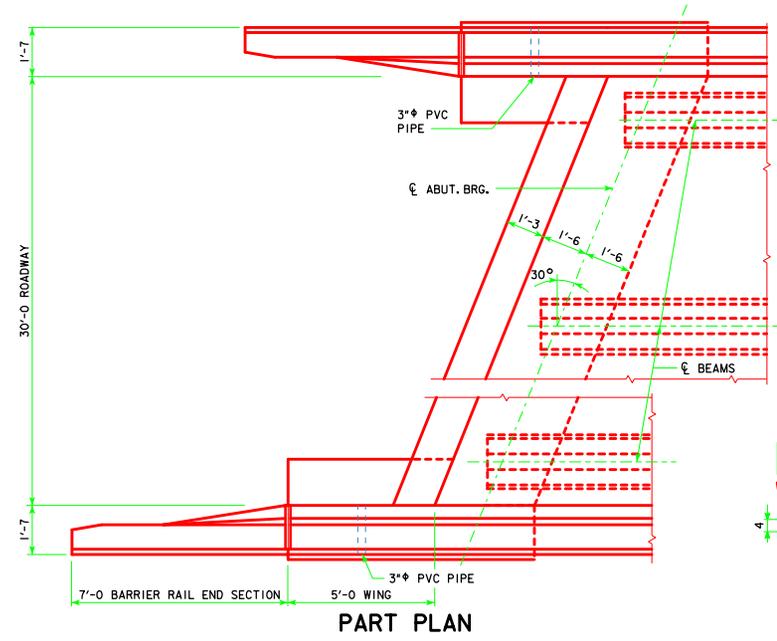

PART PLAN

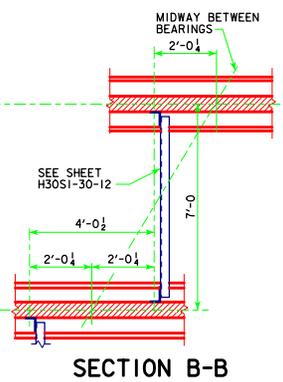


SECTION B-B

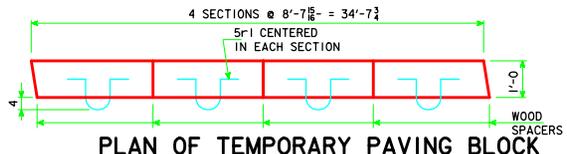


PLAN OF TEMPORARY PAVING BLOCK

NOTE: LINE PAVING NOTCH WITH TAR PAPER BEFORE PLACING THE TEMPORARY PAVING BLOCK.



DETAIL "C"
(PAVING BLOCK NOT SHOWN)

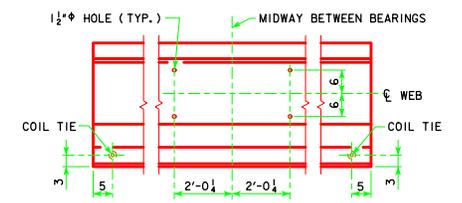

LOCATION OF BEAM COIL TIES AND STEEL DIAPHRAGM BOLT HOLES

LATEST REVISION DATE APPROVED BY BRIDGE ENGINEER <i>Thomas E. M. Donnell</i>	
	STANDARD DESIGN - 30' ROADWAY, SINGLE SPAN BRIDGE PRETENSIONED PRESTRESSED CONCRETE BEAM BRIDGES APRIL, 2012
	LONGITUDINAL SECTION H30SI-18-12 30° SKEW C & D BEAMS