


SECTION SHOWING INTERMEDIATE DIAPHRAGM

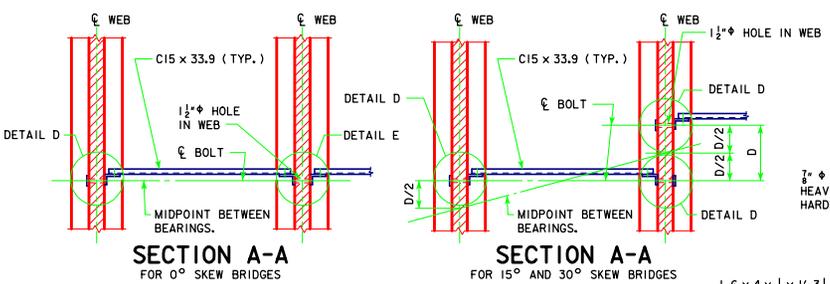

SECTION A-A FOR 0° SKEW BRIDGES

SECTION A-A FOR 15° AND 30° SKEW BRIDGES

INTERMEDIATE DIAPHRAGM STRUCTURAL STEEL

ONE CONNECTION DETAIL "E"

WEB THICKNESS (IN.)	LENGTH OF H.S. BOLTS (IN.)	WEIGHT PER DETAIL (LB.)	BRIDGE SKEW		BRIDGE SKEW	
			0°	15° & 30°	0°	15° & 30°
6	9	4.30	15	0	64.5	0.0
9	12	5.34	15	0	80.1	0.0
2 - L 6 x 4 x 1/2 x 1'-3 1/4 = 41.2 LB			15	0	618.0	0.0

ONE CONNECTION DETAIL "D"

WEB THICKNESS (IN.)	LENGTH OF H.S. BOLTS (IN.)	WEIGHT PER DETAIL (LB.)	BRIDGE SKEW		BRIDGE SKEW	
			0°	15° & 30°	0°	15° & 30°
6	9	4.30	6	36	25.8	154.8
9	12	5.34	6	36	32.0	192.2
1 - BACKING PL 4 x 3/8 x 1'-3 1/4 = 6.5 LB			6	36	39.0	234.0
1 - L 6 x 4 x 1/2 x 1'-3 1/4 = 20.6 LB			6	36	123.6	741.6

*** ONE C15 x 33.9 DIAPHRAGM**

WEB THICKNESS (IN.)	BEAM SPACING	LENGTH	NO. OF DIAPH.	UNIT WEIGHT (LB.)	WEIGHT (LB.)
6	6'-10	6'-0 3/8	18	205.2	3693.0
9	6'-10	5'-9 3/8	18	196.7	3540.4


DIAPHRAGM CONNECTION BOLTS

8 - 1/2" x 0'-2 1/2" H.S. BOLTS WITH NUTS AND WASHERS, PER UNIT DIAPHRAGM = 10.3 LB	NO. OF DIAPH.	WEIGHT (LB.)
	18	185.4


*** TOTAL WEIGHT**

	WEB THICKNESS (IN.)	BRIDGE SKEW
INTERMEDIATE DIAPHR. STRUCT. STEEL - TOTAL (LB.) =	6	4749 5009
INTERMEDIATE DIAPHR. STRUCT. STEEL - TOTAL (LB.) =	9	4619 4894

NOTE: THE STRUCTURAL STEEL DIAPHRAGM WEIGHTS TO BE INCLUDED ON THE SUMMARY QUANTITIES SHEET IN THE PLAN.

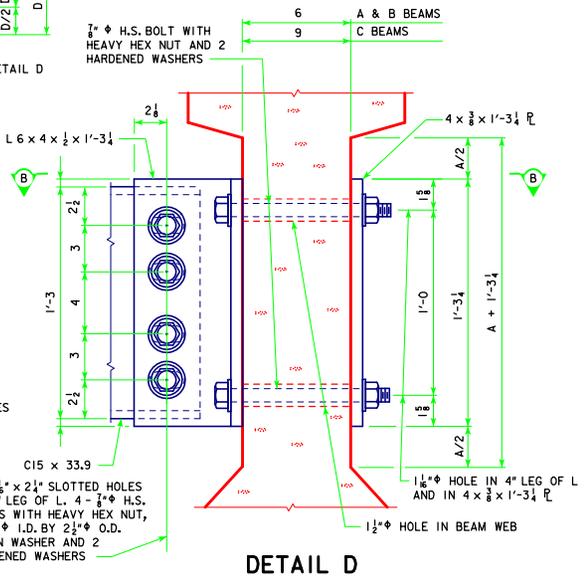

DETAIL D

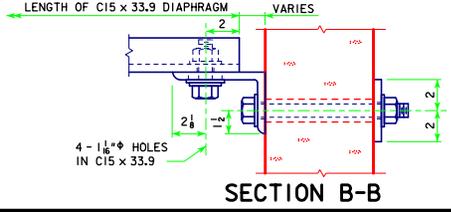


SECTION B-B

BEAM SERIES	DIMENSIONS	
	A + 1'-3 1/4	A/2
A	1'-4	2'-0
B	1'-8	2'-0
C	2'-1	4'-0

NOTES:

- ALL DIAPHRAGM MATERIALS, INCLUDING BOLTS, NUTS AND WASHERS SHALL BE GALVANIZED.
- SHOP DRAWINGS OF THE DIAPHRAGMS SHOWING LAYOUT AND DETAILS OF THE DIAPHRAGMS SHALL BE SUBMITTED FOR APPROVAL.
- ALL COSTS FOR FURNISHING AND INSTALLING STEEL INTERMEDIATE DIAPHRAGMS SHALL BE INCLUDED IN THE PRICE BID FOR STRUCTURAL STEEL.
- THE 1 1/2" HOLES FOR THE 1/2" H.S. BOLTS SHALL BE CAST INTO THE WEB. DRILLING IS NOT ALLOWED.
- THE 1/2" H.S. BOLTS THROUGH THE WEB SHALL HAVE A THREAD LENGTH OF 3" MIN. AND 4" MAX. AND SHALL MEET THE REQUIREMENTS OF ASTM A449.
- ALL BOLTS ARE TO BE TIGHTENED PRIOR TO PLACING BRIDGE FLOOR CONCRETE.

CONCRETE DIAPHRAGM DETAILS SHALL BE PROVIDED IN THE BRIDGE PLANS FOR OVERHEAD BRIDGES. DESIGNER SHALL ADJUST THE CONCRETE, REINFORCING AND STRUCTURAL STEEL QUANTITIES ACCORDINGLY.

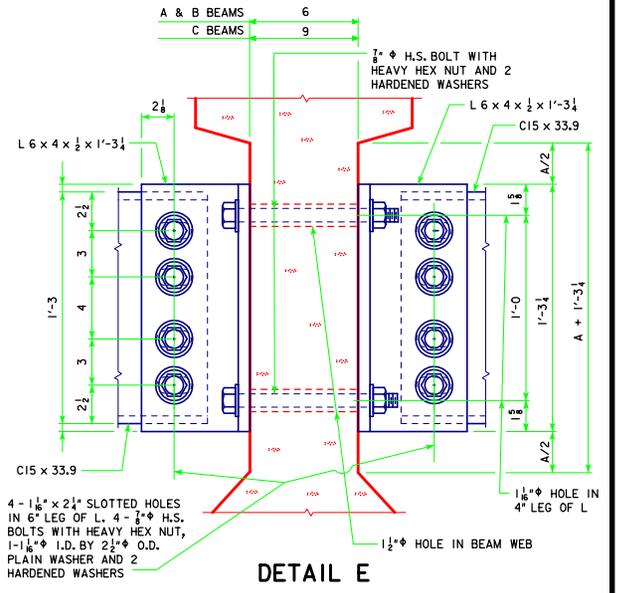

DETAIL E

LATEST REVISION DATE Approved by Bridge Engineer APPROVED BY BRIDGE ENGINEER	
	STANDARD DESIGN - 44' ROADWAY, THREE SPAN BRIDGE PRETENSIONED PRESTRESSED CONCRETE BEAM BRIDGES SEPTEMBER, 2014
	INTERMEDIATE STEEL DIAPHRAGMS
	H44-31-14