


Obtain the Engineer's approval for location and length of stabilized entrances prior to constructing.

- ① Place engineering fabric prior to placing aggregate. Use fabric for Embankment Erosion Control complying with Section 4196 of the Standard Specifications.
- ② Use aggregate meeting Gradation No. 13a of Section 4109 of the Standard Specifications.
- ③ Depth may need to be increased depending on the weight of contractor vehicles and equipment.

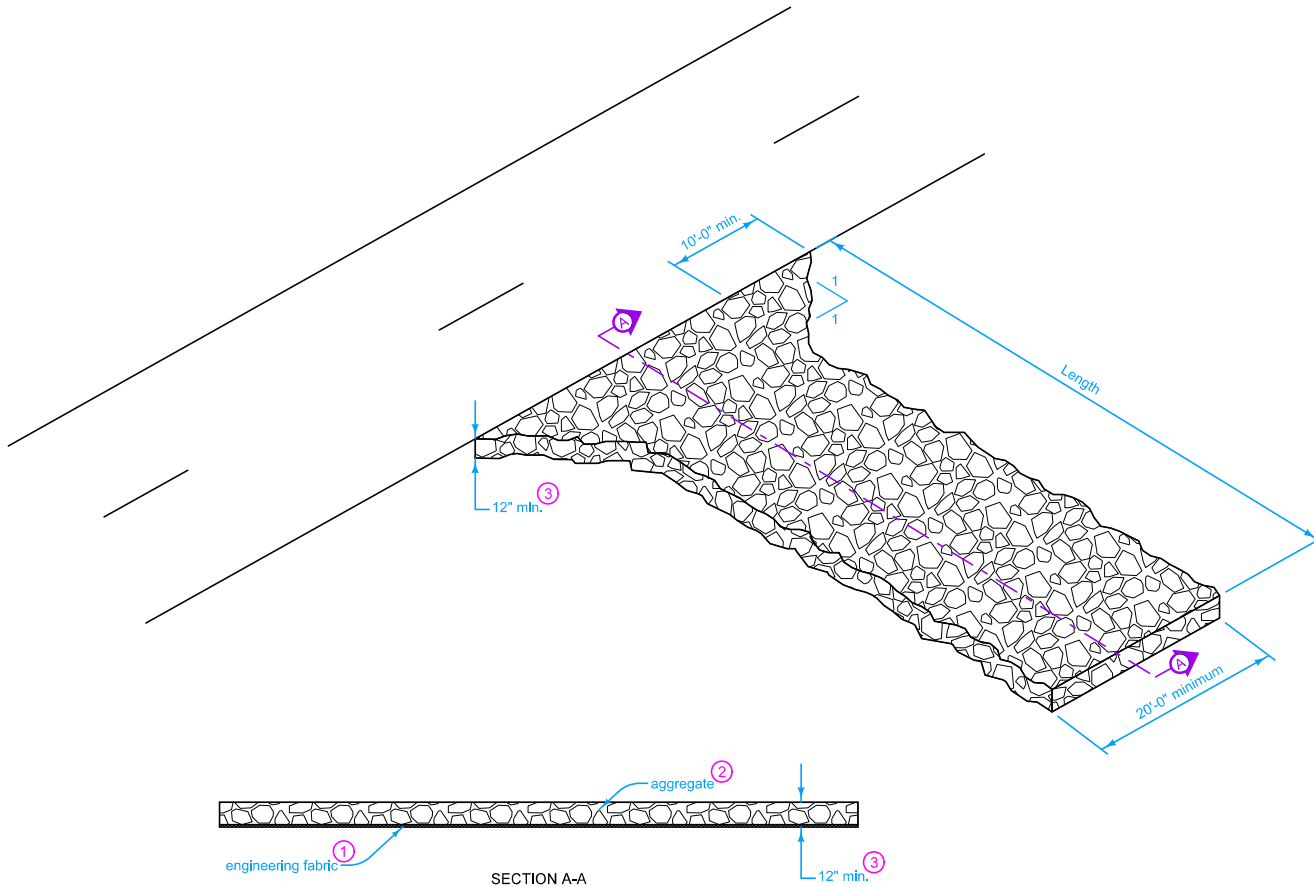

	REVISION
	3 10-20-20
STANDARD ROAD PLAN	EC-303
REVISIONS: Removed Interim from standard.	SHEET 1 of 1
APPROVED BY DESIGN METHODS ENGINEER	
STABILIZED CONSTRUCTION ENTRANCE	