


LAPPING PROCEDURE

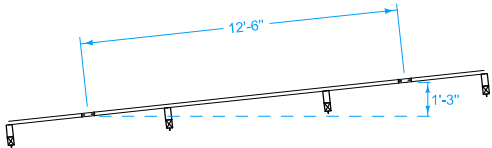

VARIABLE FLARE

Install delineators and object markers according to [SI-211](#).
 For grading requirements, see [EW-301](#).
 For general guardrail details, see [BA-200](#).

- ① See [BA-203](#).
- ② See [BA-205](#).
- ③ See [BA-206](#).

Possible Contract Items:
 Steel Beam Guardrail
 Steel Beam Guardrail End Anchor, W-Beam
 Steel Beam Guardrail Flared End Terminal, BA-206
 Steel Beam Guardrail Tangent End Terminal, BA-205

Possible Tabulation:
[108-8C](#)

IOWA DOT	REVISION	
	5	10-20-20
STANDARD ROAD PLAN		BA-252
		SHEET 1 of 1
REVISIONS: Modified to reflect change to add 25' of W-beam rail to BA-203.		
<i>Handwritten Signature</i>		
APPROVED BY DESIGN METHODS ENGINEER		
STEEL BEAM GUARDRAIL INSTALLATION AT SIDE OBSTACLE (ONE-WAY PROTECTION)		